


Materiale: Støbejern EN-GJL-200 UNI EN 1561/GG20



Se hele programmet samt aktuelle lagertal på www.klee.dk

SPA kileremskiver - for taperbøsning

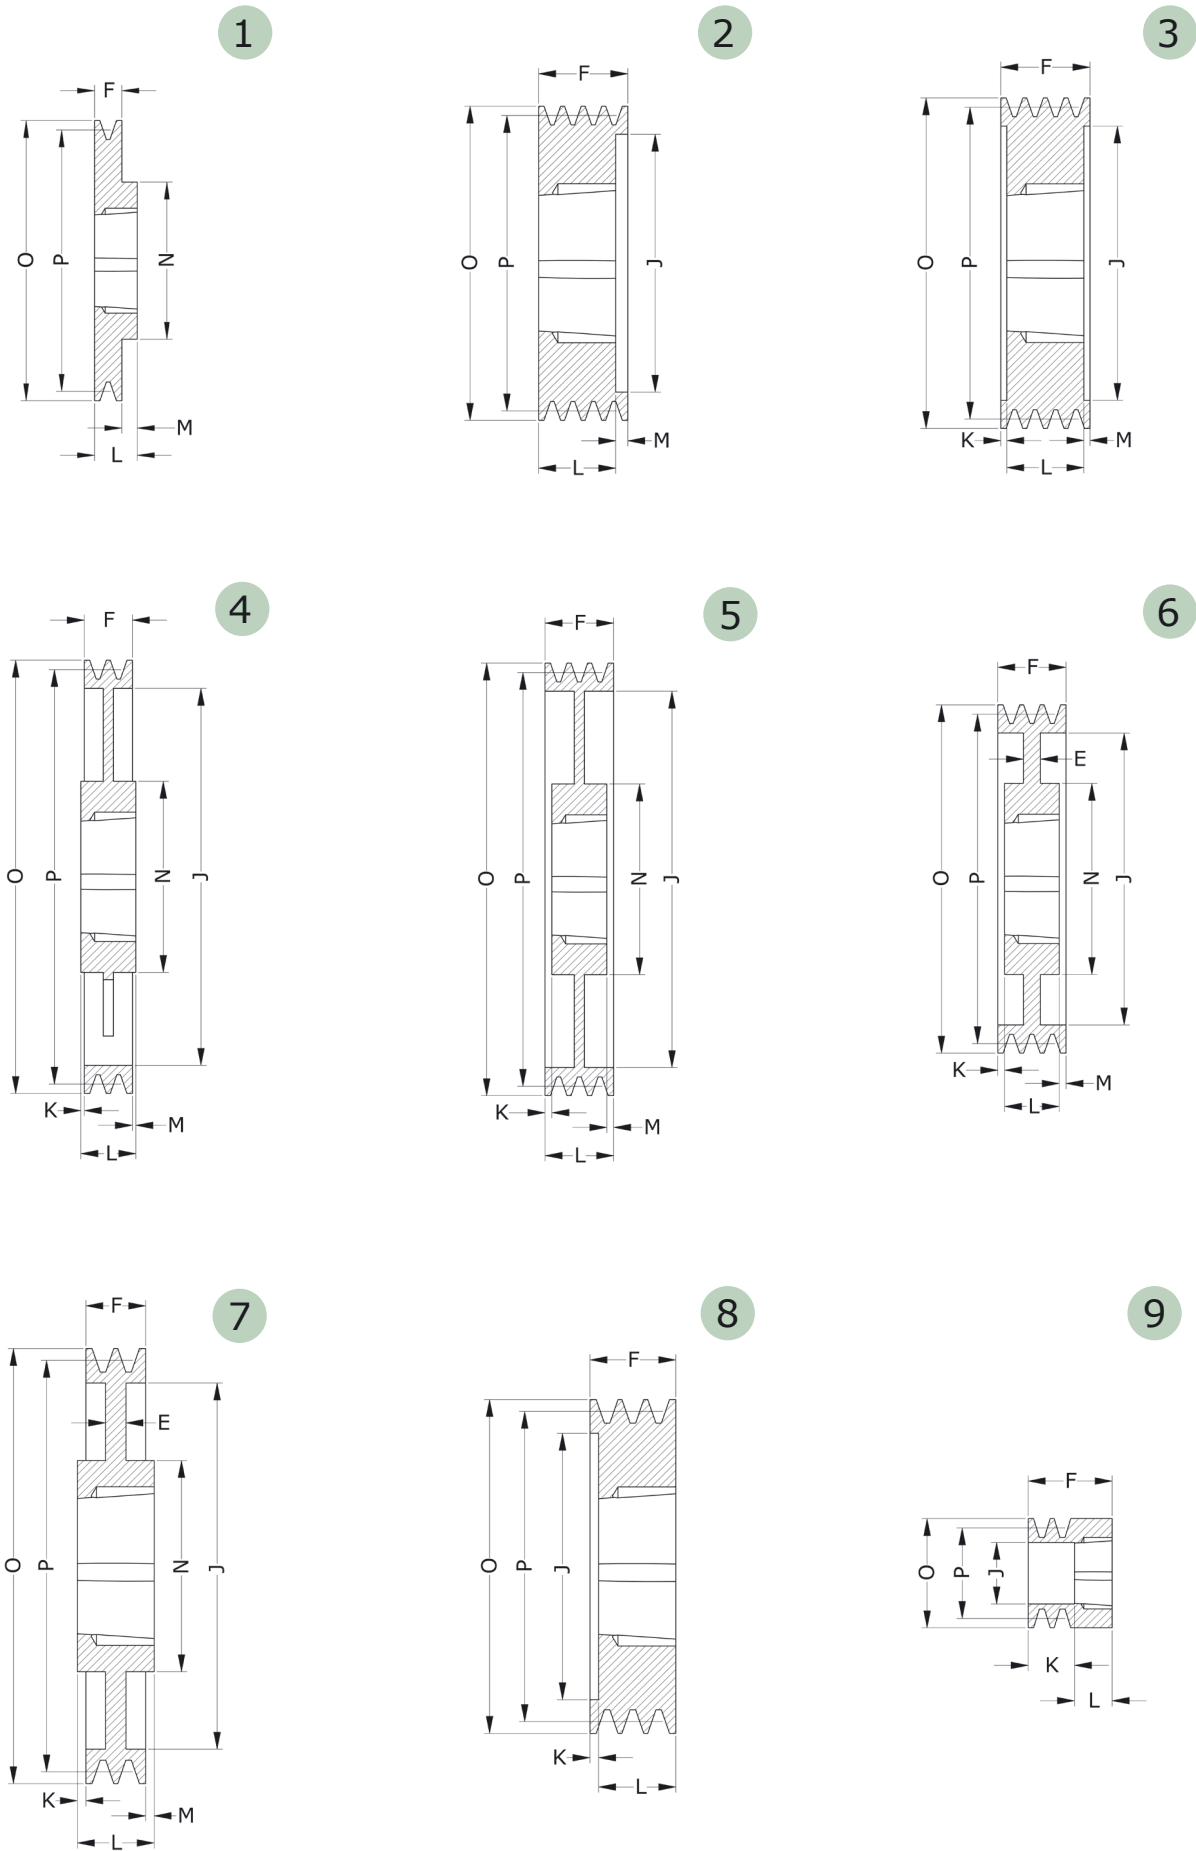

Effektiv diameter	Antal spor	Type		TB-nr.	Aksel-hul	E	F	J	K	L	M	N
		O	se s. 23									
63	1	68,5	1	1008	10-25	-	20	-	-	22	2	56
	2	68,5	8	1008	10-28	-	35	32,5	13	22	-	-
67	1	72,5	1	1108	10-28	-	20	-	-	22	2	56
	2	72,5	8	1108	10-28	-	35	37	13	22	-	-
71	1	76,5	1	1108	10-28	-	20	-	-	22	2	60
	2	76,5	8	1108	10-28	-	35	40	13	22	-	-
	3	76,5	8	1108	10-28	-	50	40	28	22	-	-
75	1	80,5	1	1108	10-28	-	20	-	-	22	2	56
	2	80,5	8	1108	10-28	-	35	44	13	22	-	-
	3	80,5	8	1108	10-28	-	50	44	28	22	-	-
80	1	85,5	1	1210	11-32	-	20	-	-	25	5	75
	2	85,5	8	1210	11-32	-	35	50	10	25	-	-
	3	85,5	8	1210	11-32	-	50	50	25	25	-	-
	4	85,5	8	1215	11-28	-	65	49	27	38	-	-
85	1	90,5	1	1210	11-32	-	20	-	-	25	5	80
	2	90,5	8	1210	11-32	-	35	55	10	25	-	-
	3	90,5	8	1210	11-32	-	50	55	25	25	-	-
90	1	95,5	1	1210	11-32	-	20	-	-	25	5	80
	2	95,5	8	1610	14-42	-	35	59	10	25	-	-
	3	95,5	8	1610	14-42	-	50	59	25	25	-	-
	4	95,5	8	1615	14-42	-	65	59	27	38	-	-
95	1	100,5	1	1210	11-32	-	20	-	-	25	5	85
	2	100,5	8	1610	14-42	-	35	63	10	25	-	-
	3	100,5	8	1610	14-42	-	50	63	25	25	-	-
	4	100,5	8	1615	14-42	-	65	63	27	38	-	-
100	1	105,5	1	1610	14-42	-	20	-	-	25	5	85
	2	105,5	8	1610	14-42	-	35	66	10	25	-	-
	3	105,5	2	1610	14-42	-	50	66	-	25	25	-
	4	105,5	2	1615	14-42	-	65	66	-	38	27	-
	5	105,5	2	1615	14-42	-	80	66	-	38	42	-
	6	105,5	3	1610	14-42	-	95	66	30	25	40	-
106	1	111,5	1	1610	14-42	-	20	-	-	25	5	92
	2	111,5	8	1610	14-42	-	35	72	10	25	-	-
	3	111,5	2	1610	14-42	-	50	72	-	25	25	-
	4	111,5	8	2012	16-50	-	65	72	33	32	-	-
	5	111,5	8	2012	16-50	-	80	72	48	32	-	-
	6	111,5	8	2012	16-50	-	95	72	63	32	-	-
112	1	117,5	1	1610	14-42	-	20	-	-	25	5	92
	2	117,5	8	1610	14-42	-	35	78	10	25	-	-
	3	117,5	8	2012	16-50	-	50	78	18	32	-	-
	4	117,5	8	2012	16-50	-	65	78	33	32	-	-
	5	117,5	8	2012	16-50	-	80	78	48	32	-	-
	6	117,5	8	2012	16-50	-	95	78	63	32	-	-
118	1	123,5	1	1610	14-42	-	20	-	-	25	5	92
	2	123,5	8	1610	14-42	-	35	84	10	25	-	-
	3	123,5	2	2012	16-50	-	50	84	-	32	18	-
	4	123,5	2	2012	16-50	-	65	84	-	32	33	-
	5	123,5	2	2012	16-50	-	80	84	-	32	48	-
	6	123,5	8	2012	16-50	-	95	84	63	32	-	-
125	1	130,5	1	1610	14-42	-	20	-	-	25	5	92
	2	130,5	8	1610	14-42	-	35	91	10	25	-	-
	3	130,5	2	2012	16-50	-	50	91	-	32	18	-
	4	130,5	2	2012	16-50	-	65	91	-	32	33	-
	5	130,5	3	2012	16-50	-	80	91	24	32	24	-
	6	130,5	3	2012	16-50	-	95	91	31,5	32	31,5	-
132	1	137,5	1	1610	14-42	-	20	-	-	25	5	92
	2	137,5	8	2012	16-50	-	35	98	3	32	-	-
	3	137,5	2	2012	16-50	-	50	98	-	32	18	-
	4	137,5	2	2517	18-65	-	65	98	-	45	20	-
	5	137,5	3	2517	18-65	-	80	98	17,5	45	17,5	-
	6	137,5	3	2517	18-65	-	95	98	25	45	25	-



SPA kileremskiver - for taperbøsning


Effektiv diameter	Antal spor	O	Type se s. 23	TB-nr.	Aksel-hul	E	F	J	K	L	M	N
140	1	145,5	1	1610	14-42	-	20	-	-	25	5	92
	2	145,5	8	2012	16-50	-	35	106	3	32	-	-
	3	145,5	8	2517	18-65	-	50	106	5	45	-	-
	4	145,5	2	2517	18-65	-	65	106	-	45	20	-
	5	145,5	3	2517	18-65	-	80	106	17,5	45	17,5	-
	6	145,5	3	2517	18-65	-	95	106	25	45	25	-
150	1	155,5	1	1610	14-42	-	20	-	-	25	5	92
	2	155,5	8	2012	16-50	-	35	116	3	32	-	-
	3	155,5	8	2517	18-65	-	50	116	5	45	-	-
	4	155,5	2	2517	18-65	-	65	116	-	45	20	-
	5	155,5	3	2517	18-65	-	80	116	17,5	45	17,5	-
	6	155,5	3	2517	18-65	-	95	116	25	45	25	-
160	1	165,5	1	1610	14-42	-	20	-	-	25	5	92
	2	165,5	8	2012	16-50	-	35	125	3	32	-	-
	3	165,5	8	2517	18-65	-	50	125	5	45	-	-
	4	165,5	2	2517	18-65	-	65	125	-	45	20	-
	5	165,5	3	2517	18-65	-	80	125	17,5	45	17,5	-
	6	165,5	3	2517	18-65	-	95	125	25	45	25	-
170	1	175,5	1	1610	14-42	-	20	-	-	25	5	92
	2	175,5	8	2012	16-50	-	35	135	3	32	-	-
	3	175,5	8	2517	18-65	-	50	135	5	45	-	-
	4	175,5	2	2517	18-65	-	65	135	-	45	20	-
	5	175,5	3	2517	18-65	-	80	135	17,5	45	17,5	-
180	1	185,5	7	1610	14-42	6	20	145	-	25	5	92
	2	185,5	6	2012	16-50	10	35	146	1,5	32	1,5	108
	3	185,5	8	2517	18-65	-	50	146	5	45	-	-
	4	185,5	2	2517	18-65	-	65	146	-	45	20	-
	5	185,5	3	3020	28-75	-	80	146	-	51	29	-
	6	185,5	3	3020	28-75	-	95	146	22	51	22	-
190	1	195,5	7	1610	14-42	6	20	156	-	25	5	92
	2	195,5	6	2012	16-50	10	35	156	1,5	32	1,5	108
	3	195,5	8	2517	18-65	-	50	156	5	45	-	-
	4	195,5	2	2517	18-65	-	65	156	-	45	20	-
	5	195,5	2	3020	28-75	-	80	156	14,5	51	14,5	-
200	1	205,5	7	2012	16-50	6	20	165	-	32	12	108
	2	205,5	7	2517	18-65	10	35	165	5	45	5	123
	3	205,5	6	2517	18-65	20	50	165	2,5	45	2,5	123
	4	205,5	2	3020	28-75	-	65	165	-	51	14	-
	5	205,5	3	3020	28-75	-	80	165	14,5	51	14,5	-
	6	205,5	3	3020	28-75	-	95	165	22	51	22	-
212	1	217,5	7	2012	16-50	10	20	177	-	32	12	110
	2	217,5	7	2517	18-65	18	35	177	5	45	5	123
	3	217,5	6	2517	18-65	20	50	177	2,5	45	2,5	123
	4	217,5	2	3020	28-75	-	65	177	-	51	14	-
	5	217,5	2	3020	28-75	-	80	177	-	51	29	-
	6	217,5	3	3020	28-75	-	95	176	22	51	22	-
224	1	229,5	7	2012	16-50	10	20	189	-	32	12	112
	2	229,5	7	2517	18-65	18	35	189	-	45	10	124
	3	229,5	6	2517	18-65	20	50	189	2,5	45	2,5	124
	4	229,5	2	3020	28-75	-	65	189	-	51	14	-
	5	229,5	2	3020	28-75	-	80	189	-	51	29	-
	6	229,5	3	3020	28-75	-	95	189	22	51	22	-
236	1	241,5	7	2012	16-50	10	20	202	-	32	12	112
	2	241,5	7	2517	18-65	12	35	202	-	45	10	124
	3	241,5	6	2517	18-65	20	50	202	2,5	45	2,5	124
	4	241,5	6	3020	28-75	25	65	202	-	51	14	-
	5	241,5	2	3020	28-75	-	80	202	-	51	29	-
	6	241,5	3	3020	28-75	-	95	202	22	51	22	-
250	1	255,5	7	2012	16-50	10	20	215	6	32	6	112
	2	255,5	7	2517	18-65	12	35	215	5	45	5	124
	3	255,5	6	2517	18-65	20	50	215	2,5	45	2,5	124
	4	255,5	6	3020	28-75	20	65	215	7	51	7	159
	5	255,5	6	3020	28-75	20	80	215	14,5	51	14,5	159
	6	255,5	6	3020	28-75	20	95	215	22	51	22	155

SPA kileremskiver - for taperbøsning



Effektiv diameter	Antal spor	Type		TB-nr.	Aksel-hul	E	F	J	K	L	M	N
		O	se s. 23									
280	1	285,5	7	2012	16-50	10	20	245	-	32	12	112
	2	285,5	7	2517	18-65	12	35	245	-	45	10	124
	3	285,5	6	2517	18-65	20	50	245	2,5	45	2,5	124
	4	285,5	6	3020	28-75	25	65	245	7	51	7	159
	5	285,5	7	3535	35-90	25	80	245	4,5	89	4,5	175
	6	285,5	6	3535	35-90	25	95	245	3	89	3	175
300	1	305,5	7	2012	16-50	12	20	265	-	32	12	112
	2	305,5	7	2517	18-65	12	35	265	-	45	10	124
	3	305,5	4	3020	28-75	-	50	265	0,5	51	0,5	146
	4	305,5	6	3020	28-75	25	65	265	7	51	7	159
	5	305,5	7	3535	35-90	25	80	265	4,5	89	4,5	175
	6	305,5	6	3535	35-90	25	95	265	3	89	3	175
315	1	320,5	7	2012	16-50	12	20	280	-	32	12	112
	2	320,5	7	2517	18-65	12	35	280	-	45	10	124
	3	320,5	4	3020	28-75	25	50	280	0,5	51	0,5	159
	4	320,5	6	3020	28-75	25	65	280	7	51	7	159
	5	320,5	7	3535	35-90	25	80	280	4,5	89	4,5	175
	6	320,5	6	3535	35-90	25	95	280	3	89	3	175
355	1	360,5	4	2012	16-50	-	20	320	-	32	12	112
	2	360,5	4	2517	18-65	-	35	320	-	45	10	124
	3	360,5	4	3020	28-75	-	50	320	0,5	51	0,5	159
	4	360,5	5	3020	28-75	-	65	320	7	51	7	159
	5	360,5	4	3535	35-90	-	80	320	4,5	89	4,5	175
	6	360,5	5	3535	35-90	-	95	320	3	89	3	175
400	1	405,5	4	2012	16-50	-	20	365	-	32	12	112
	2	405,5	4	2517	18-65	-	35	365	-	45	10	124
	3	405,5	4	3020	28-75	-	50	365	-	51	1	159
	4	405,5	5	3020	28-75	-	65	365	7	51	7	159
	5	405,5	4	3535	35-90	-	80	365	4,5	89	4,5	175
	6	405,5	5	3535	35-90	-	95	365	3	89	3	175
450	1	455,5	4	2012	18-65	-	20	415	-	32	12	112
	2	455,5	4	2517	18-65	-	35	465	-	45	10	124
	3	455,5	4	3020	28-75	-	50	415	-	51	1	159
	4	455,5	5	3020	28-75	-	65	415	7	51	7	159
	5	455,5	4	3535	35-90	-	80	415	4,5	89	4,5	175
	6	455,5	5	3535	35-90	-	95	415	3	89	3	175
500	1	505,5	4	2517	18-65	-	20	465	-	45	25	124
	2	505,5	4	2517	18-65	-	35	525	-	45	10	125
	3	505,5	4	3020	28-75	-	50	465	-	51	1	159
	4	505,5	5	3020	28-75	-	65	465	7	51	7	159
	5	505,5	4	3535	35-90	-	80	465	4,5	89	4,5	175
	6	505,5	5	3535	35-90	-	95	465	3	89	3	175
560	3	565,5	4	3020	28-75	-	50	525	-	51	1	150
	4	565,5	4	3535	35-90	-	65	525	12	89	12	175
	5	565,5	4	3535	35-90	-	80	525	4,5	89	4,5	175
	6	565,5	5	3535	35-90	-	95	525	3	89	3	175
630	1	635,5	4	2517	18-65	-	20	595	-	45	25	124
	2	635,5	4	3020	28-75	-	35	595	8	51	18	159
	3	635,5	4	3020	28-75	-	50	595	-	51	1	150
	4	635,5	4	3535	35-90	-	65	595	12	89	12	175
	5	635,5	4	3535	35-90	-	80	595	4,5	89	4,5	175
	6	635,5	4	4040	40-100	-	95	595	3,5	102	3,5	210
800	3	805,5	4	3535	35-90	-	50	765	19,5	89	19,5	175
	4	805,5	4	3535	35-90	-	65	765	12	89	12	175
	5	805,5	4	4040	40-100	-	80	765	11	102	11	210
	6	805,5	4	4040	40-100	-	95	765	3,5	102	3,5	210
1000	3	1005,5	4	3535	35-90	-	50	965	19,5	89	19,5	175
	4	1005,5	4	4040	40-100	-	65	965	18,5	102	18,5	210
	5	1005,5	4	4545	55-110	-	80	965	17	114	17	242
	6	1005,5	4	4545	55-110	-	95	965	9,5	114	9,5	242

Materiale: Støbejern EN-GJL-200 UNI EN 1561/GG20

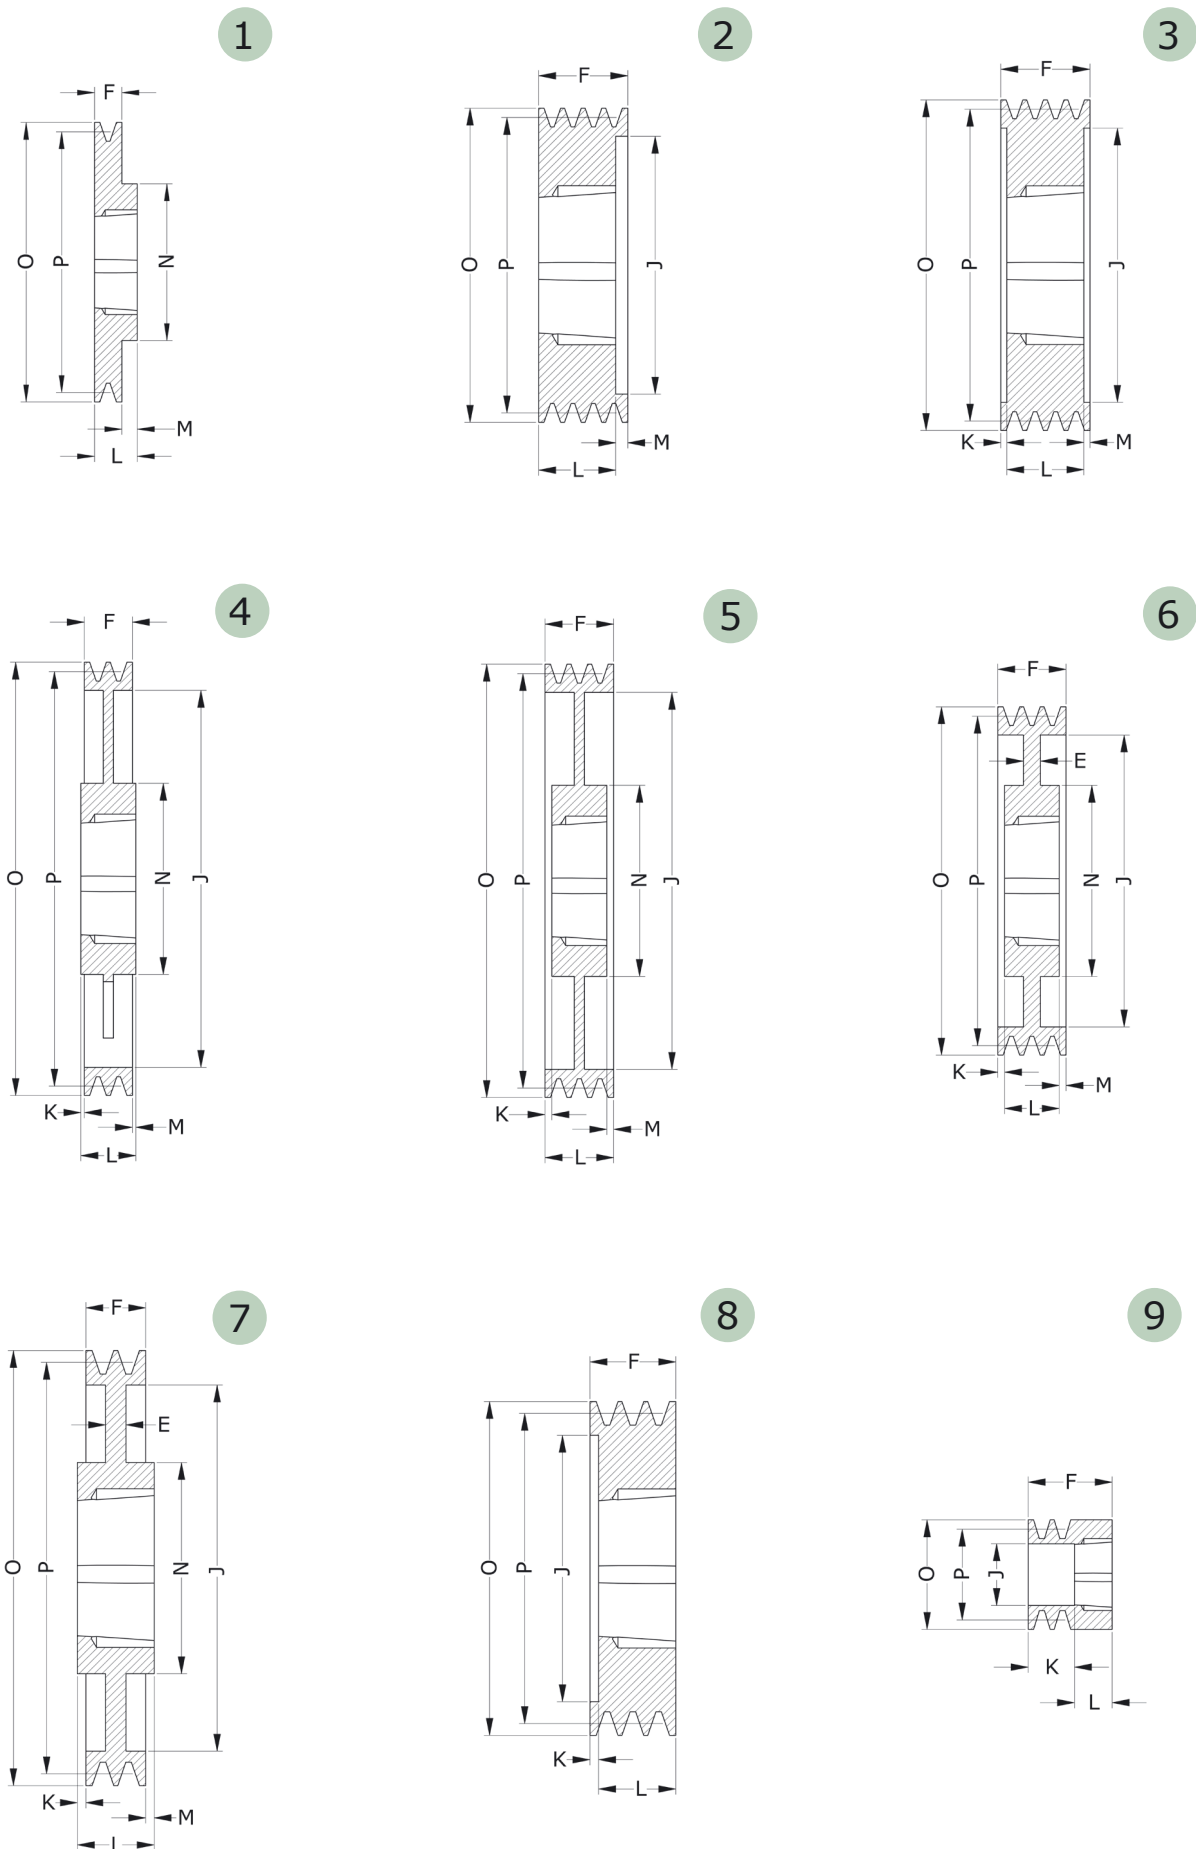

SPB kileremskiver - for taperbøsning



Effektiv diameter	Antal spor	Type		TB-nr.	Aksel-hul	E	F	J	K	L	M	N
		O	se s. 27									
100	1	107	1	1610	14-42	-	25	-	-	25	-	-
	2	107	8	1610	14-42	-	44	62	19	25	-	-
	3	107	8	1610	14-42	-	63	62	38	25	-	-
106	1	113	1	1610	14-42	-	25	-	-	25	-	-
	2	113	8	1610	14-42	-	44	67	19	25	-	-
	3	113	8	1610	14-42	-	63	67	38	25	-	-
112	1	119	1	1610	14-42	-	25	-	-	25	-	-
	2	119	8	1610	14-42	-	44	72	19	25	-	-
	3	119	8	1610	14-42	-	63	72	38	25	-	-
	4	119	8	1610	14-42	-	82	72	57	25	-	-
118	1	125	1	1610	14-42	-	25	-	-	25	-	-
	2	125	2	1610	14-42	-	44	78	-	25	19	-
	3	125	2	1610	14-42	-	63	78	-	25	38	-
125	1	132	1	1610	14-42	-	25	-	-	25	-	-
	2	132	2	2012	16-50	-	44	82	-	32	12	-
	3	132	2	2012	16-50	-	63	82	-	32	31	-
	4	132	3	2012	16-50	-	82	82	25	32	25	-
	5	132	8	2012	16-50	-	101	87	69	32	-	-
132	1	139	1	1610	14-42	-	25	-	-	25	-	-
	2	139	2	2012	16-50	-	44	89	-	32	12	-
	3	139	2	2012	16-50	-	63	89	-	32	31	-
	4	139	3	2012	16-50	-	82	89	25	32	25	-
	5	139	8	2517	18-65	-	101	94	56	45	-	-
140	1	147	1	1610	14-42	-	25	-	-	25	-	-
	2	147	2	2012	16-50	-	44	97	-	32	12	-
	3	147	2	2012	16-50	-	63	97	-	32	31	-
	4	147	3	2517	18-65	-	82	100	18,5	45	18,5	-
	5	147	3	2517	18-65	-	101	97	28	45	28	-
	6	147	3	2517	18-65	-	120	100	37,5	45	37,5	-
	8	147	3	2517	18-65	-	158	97	56,5	45	56,5	-
	150	1	157	1	1610	14-42	-	25	-	-	25	-
2		157	2	2012	16-50	-	44	107	-	32	12	-
3		157	2	2517	18-65	-	63	107	-	45	18	-
4		157	3	2517	18-65	-	82	107	18,5	45	18,5	-
5		157	3	2517	18-65	-	101	107	28	45	28	-
6		157	3	2517	18-65	-	120	107	37,5	45	37,5	-
160	1	167	1	1610	14-42	-	25	-	-	25	-	-
	2	167	2	2012	16-50	-	44	117	-	32	12	-
	3	167	2	2517	18-65	-	63	117	-	45	18	-
	4	167	3	2517	18-65	-	82	117	18,5	45	18,5	-
	5	167	3	2517	18-65	-	101	117	28	45	28	-
	6	167	3	3020	28-75	-	120	117	34,5	51	34,5	-
	8	167	3	3020	28-75	-	158	117	53,5	51	53,5	-
	170	1	177	1	1610	14-42	-	25	-	-	25	-
2		177	2	2012	16-50	-	44	127	-	32	12	-
3		177	2	2517	18-65	-	63	127	-	45	18	-
4		177	3	2517	18-65	-	82	127	18,5	45	18,5	-
5		177	3	3020	28-75	-	101	127	25	51	25	-
6		177	3	3020	28-75	-	120	127	34,5	51	34,5	-
8		177	3	3030	35-75	-	158	127	41	76	41	-
180		1	187	6	1610	14-42	15	25	132	-	25	-
	2	187	1	2517	18-65	-	44	-	-	45	1	120
	3	187	2	2517	18-65	-	63	137	-	45	18	-
	4	187	3	2517	18-65	-	82	137	18,5	45	18,5	-
	5	187	3	3020	28-75	-	101	137	25	51	25	-
	6	187	3	3020	28-75	-	120	137	34,5	51	34,5	-
	8	187	3	3030	35-75	-	158	137	41	76	41	-
	190	1	197	7	2012	16-50	15	25	147	3,5	32	3,5
2		197	1	2517	18-65	-	44	-	-	45	1	120
3		197	2	2517	18-65	-	63	147	-	45	18	-
4		197	3	2517	18-65	-	82	147	18,5	45	18,5	-
5		197	3	3020	28-75	-	101	147	25	51	25	-
6		197	3	3020	28-75	-	120	147	34,5	51	34,5	-
8		197	3	3030	35-75	-	158	147	41	76	41	-



SPB kileremskiver - for taperbøsning

Effektiv diameter	Antal spor	O	Type se s. 27	TB-nr.	Aksel-hul	E	F	J	K	L	M	N	
200	1	207	7	2012	16-50	15	25	157	3,5	32	3,5	104	
	2	207	1	2517	18-65	-	44	-	-	45	1	117	
	3	207	2	2517	18-65	-	63	157	-	45	18	-	
	4	207	3	3020	28-75	-	82	157	15,5	51	15,5	-	
	5	207	3	3020	28-75	-	101	157	25	51	25	-	
	6	207	3	3020	28-75	-	120	157	34,5	51	34,5	-	
	8	207	3	3535	35-90	-	158	157	34,5	89	34,5	-	
	212	1	219	7	2012	16-50	15	25	169	3,5	32	3,5	104
2		219	7	2517	18-65	20	44	169	-	45	1	117	
3		219	6	2517	18-65	15	63	169	-	45	18	117	
4		219	3	3020	28-75	-	82	169	15,5	51	15,5	-	
5		219	3	3020	28-75	-	101	169	25	51	25	-	
6		219	3	3535	35-90	-	120	169	15,5	89	15,5	-	
8		219	3	3535	35-90	-	158	169	34,5	89	34,5	-	
224		1	231	7	2012	16-50	15	25	181	3,5	32	3,5	104
	2	231	7	2517	18-65	15	44	181	-	45	1	117	
	3	231	6	2517	18-65	15	63	181	-	45	18	117	
	4	231	3	3020	28-75	-	82	181	15,5	51	15,5	-	
	5	231	3	3020	28-75	-	101	181	25	51	25	-	
	6	231	3	3535	35-90	-	120	181	15,5	89	15,5	-	
	8	231	3	3535	35-90	-	158	181	34,5	89	34,5	-	
	10	231	3	3535	35-90	-	196	181	53,5	89	53,5	-	
	236	1	243	7	2012	16-50	15	25	193	3,5	32	3,5	104
		2	243	7	2517	18-65	15	44	193	-	45	1	117
3		243	6	2517	18-65	15	63	193	-	45	18	117	
4		243	3	3020	28-75	-	82	193	15,5	51	15,5	-	
5		243	3	3535	35-90	-	101	193	6	89	6	-	
6		243	3	3535	35-90	-	120	193	15,5	89	15,5	-	
8		243	3	3535	35-90	-	158	193	34,5	89	34,5	-	
10		243	3	3535	35-90	-	196	193	53,5	89	53,5	-	
250		1	257	7	2012	16-50	20	25	207	3,5	32	3,5	104
		2	257	7	2517	18-65	20	44	207	-	45	1	125
	3	257	6	3020	28-75	20	63	207	-	51	12	144	
	4	257	6	3020	28-75	25	82	207	15,5	51	15,5	144	
	5	257	3	3535	35-90	-	101	207	6	89	6	-	
	6	257	3	3535	35-90	-	120	207	15,5	89	15,5	-	
	8	257	3	3535	35-90	-	158	207	34,5	89	34,5	-	
	10	257	3	3535	35-90	-	196	207	53,5	89	53,5	-	
	280	1	287	7	2012	16-50	20	25	237	3,5	32	3,5	104
		2	287	7	2517	18-65	20	44	237	-	45	1	125
3		287	6	3020	28-75	20	63	237	6	51	6	144	
4		287	6	3020	28-75	25	82	237	15,5	51	15,5	144	
5		287	6	3535	35-90	25	101	237	6	89	6	175	
6		287	6	3535	35-90	25	120	237	15,5	89	15,5	175	
8		287	6	3535	35-90	25	158	237	34,5	89	34,5	175	
10		287	6	3535	35-90	30	196	237	53,5	89	53,5	175	
300		1	307	7	2012	16-50	20	25	258	3,5	32	3,5	104
		2	307	7	2517	18-65	20	44	257	-	45	1	125
	3	307	6	3020	28-75	20	63	257	6	51	6	144	
	4	307	7	3535	28-90	25	82	257	-	89	7	175	
	5	307	6	3535	35-90	25	101	257	6	89	6	175	
	6	307	6	3535	35-90	25	120	257	15,5	89	15,5	175	
	8	307	6	3535	35-90	25	158	257	34,5	89	34,5	175	
	315	1	322	7	2012	16-50	20	25	272	3,5	32	3,5	104
2		322	7	2517	18-65	20	44	272	-	45	1	125	
3		322	6	3020	28-75	20	63	272	6	51	6	144	
4		322	7	3535	35-90	25	82	272	3,5	89	3,5	175	
5		322	6	3535	35-90	25	101	272	6	89	6	175	
6		322	6	3535	35-90	25	120	272	15,5	89	15,5	175	
8		322	6	3535	35-90	25	158	272	34,5	89	34,5	175	
10		322	6	3535	35-90	30	196	272	53,5	89	53,5	175	

SPB kileremskiver - for taperbøsning



Effektiv diameter	Antal spor	Type		TB-nr.	Aksel-hul	E	F	J	K	L	M	N
		O	se s. 27									
335	2	342	7	2517	18-65	20	44	292	-	45	1	125
	3	342	6	3020	28-75	20	63	292	6	51	6	144
	4	342	7	3535	35-90	25	82	292	3,5	89	3,5	175
	5	342	6	3535	35-90	25	101	292	6	89	6	175
	6	342	6	3535	35-90	25	120	292	15,5	89	15,5	175
	8	342	6	3535	35-90	25	158	292	34,5	89	34,5	175
	10	342	6	4040	40-100	30	196	292	47	102	47	210
355	2	362	7	3020	28-75	15	44	312	3,5	51	3,5	144
	3	362	6	3020	28-75	15	63	312	6	51	6	144
	4	362	7	3535	35-90	25	82	312	3,5	89	3,5	175
	5	362	6	3535	35-90	17	101	312	6	89	6	175
	6	362	6	3535	35-90	25	120	312	15,5	89	15,5	175
	8	362	6	3535	35-90	25	158	312	34,5	89	34,5	175
	10	362	6	4040	40-100	30	196	312	47	102	47	210
400	2	407	4	3020	28-75	-	44	357	3,5	51	3,5	150
	3	407	4	3535	35-90	-	63	357	13	89	13	175
	4	407	4	3535	35-90	-	82	357	3,5	89	3,5	175
	5	407	5	3535	35-90	-	101	357	6	89	6	175
	6	407	5	3535	35-90	-	120	357	15,5	89	15,5	175
	8	407	6	4040	40-100	30	158	357	28	102	28	210
	10	407	6	4040	40-100	30	196	357	47	102	47	210
450	2	457	4	3020	28-75	-	44	407	3,5	51	3,5	150
	3	457	4	3535	35-90	-	63	407	-	89	26	175
	4	457	4	3535	35-90	-	82	407	-	89	7	175
	5	457	5	3535	35-90	-	101	407	-	89	12	175
	6	457	5	4040	40-100	-	120	407	-	102	18	210
	8	457	5	4040	40-100	-	158	407	28	102	28	210
	10	457	5	4545	55-110	-	196	407	41	114	41	242
500	2	507	4	3020	28-75	-	44	457	3,5	51	3,5	150
	3	507	4	3535	35-90	-	63	457	-	89	26	175
	4	507	4	3535	35-90	-	82	457	-	89	7	175
	5	507	5	3535	35-90	-	101	457	-	89	12	175
	6	507	5	4040	40-100	-	120	457	-	102	18	210
	8	507	5	4040	40-100	-	158	457	28	102	28	210
	10	507	5	4545	55-110	-	196	457	41	114	41	242
560	2	567	4	3030	35-75	-	44	517	4	76	28	150
	3	567	4	3535	35-90	-	63	517	-	89	26	175
	4	567	4	3535	35-90	-	82	517	-	89	7	175
	5	567	4	4040	40-100	-	101	517	-	102	1	210
	6	567	5	4040	40-100	-	120	517	-	102	18	210
	8	567	5	4545	55-110	-	158	517	22	114	22	242
	10	567	5	4545	55-110	-	196	517	41	114	41	242
630	2	637	4	3030	35-75	-	44	587	16	76	16	150
	3	637	4	3535	35-90	-	63	587	-	89	26	175
	4	637	4	3535	35-90	-	82	587	-	89	7	175
	5	637	4	4040	40-100	-	101	587	-	102	1	210
	6	637	5	4040	40-100	-	120	587	-	102	18	210
	8	637	5	4545	55-110	-	158	587	22	114	22	242
	10	637	5	4545	55-110	-	196	587	41	114	41	242
710	3	717	4	3535	35-90	-	63	664	13	89	13	175
	4	717	4	3535	35-90	-	82	664	3,5	89	3,5	175
	5	717	4	4040	40-100	-	101	664	-	102	1	210
	6	717	5	4040	40-100	-	120	664	9	102	9	210
	8	717	5	4545	55-110	-	158	664	22	114	22	242
	10	717	5	4545	55-110	-	196	664	41	114	41	242
800	3	807	4	3535	35-90	-	63	754	13	89	13	175
	4	807	4	4040	40-100	-	82	754	10	102	10	210
	5	807	4	4040	40-100	-	101	754	-	102	1	210
	6	807	5	4545	55-110	-	120	754	3	114	3	242
	8	807	5	4545	55-110	-	158	754	22	114	22	242
	10	807	5	4545	55-110	-	196	754	41	114	41	242




SPB kileremskiver - for taperbøsning

Effektiv diameter	Antal spor	O	Type se s. 27	TB-nr.	Aksel-hul	E	F	J	K	L	M	N
900	3	907	4	3535	35-90	-	63	854	13	89	13	175
	4	907	4	4040	40-100	-	82	854	10	102	10	210
	5	907	4	4040	40-100	-	101	854	-	102	1	210
	6	907	5	4545	55-110	-	120	854	3	114	3	242
	8	907	5	4545	55-110	-	158	854	22	114	22	242
	10	907	5	5050	70-125	-	196	854	34,5	127	34,5	267
1000	3	1007	4	4040	40-100	-	63	954	19,5	102	19,5	210
	4	1007	4	4040	40-100	-	82	954	10	102	16	210
	5	1007	4	4545	55-110	-	101	954	6,5	114	6,5	242
	6	1007	5	4545	55-110	-	120	954	3	114	3	242
	8	1007	5	5050	70-125	-	158	954	15,5	127	15,5	267
	10	1007	5	5050	70-125	-	196	954	34,5	127	34,5	267
1250	3	1257	4	4040	40-100	-	63	1204	19,5	102	19,5	210
	4	1257	4	4545	55-110	-	82	1204	16	114	16	210
	5	1257	4	4545	55-110	-	101	1204	6,5	114	6,5	242
	6	1257	5	4545	55-110	-	120	1204	3	114	3	242
	8	1257	5	5050	70-125	-	158	1204	15,5	127	15,5	267

SPC kileremskiver - for taperbøsning



Materiale: Støbejern EN-GJL-200 UNI EN 1561/GG20

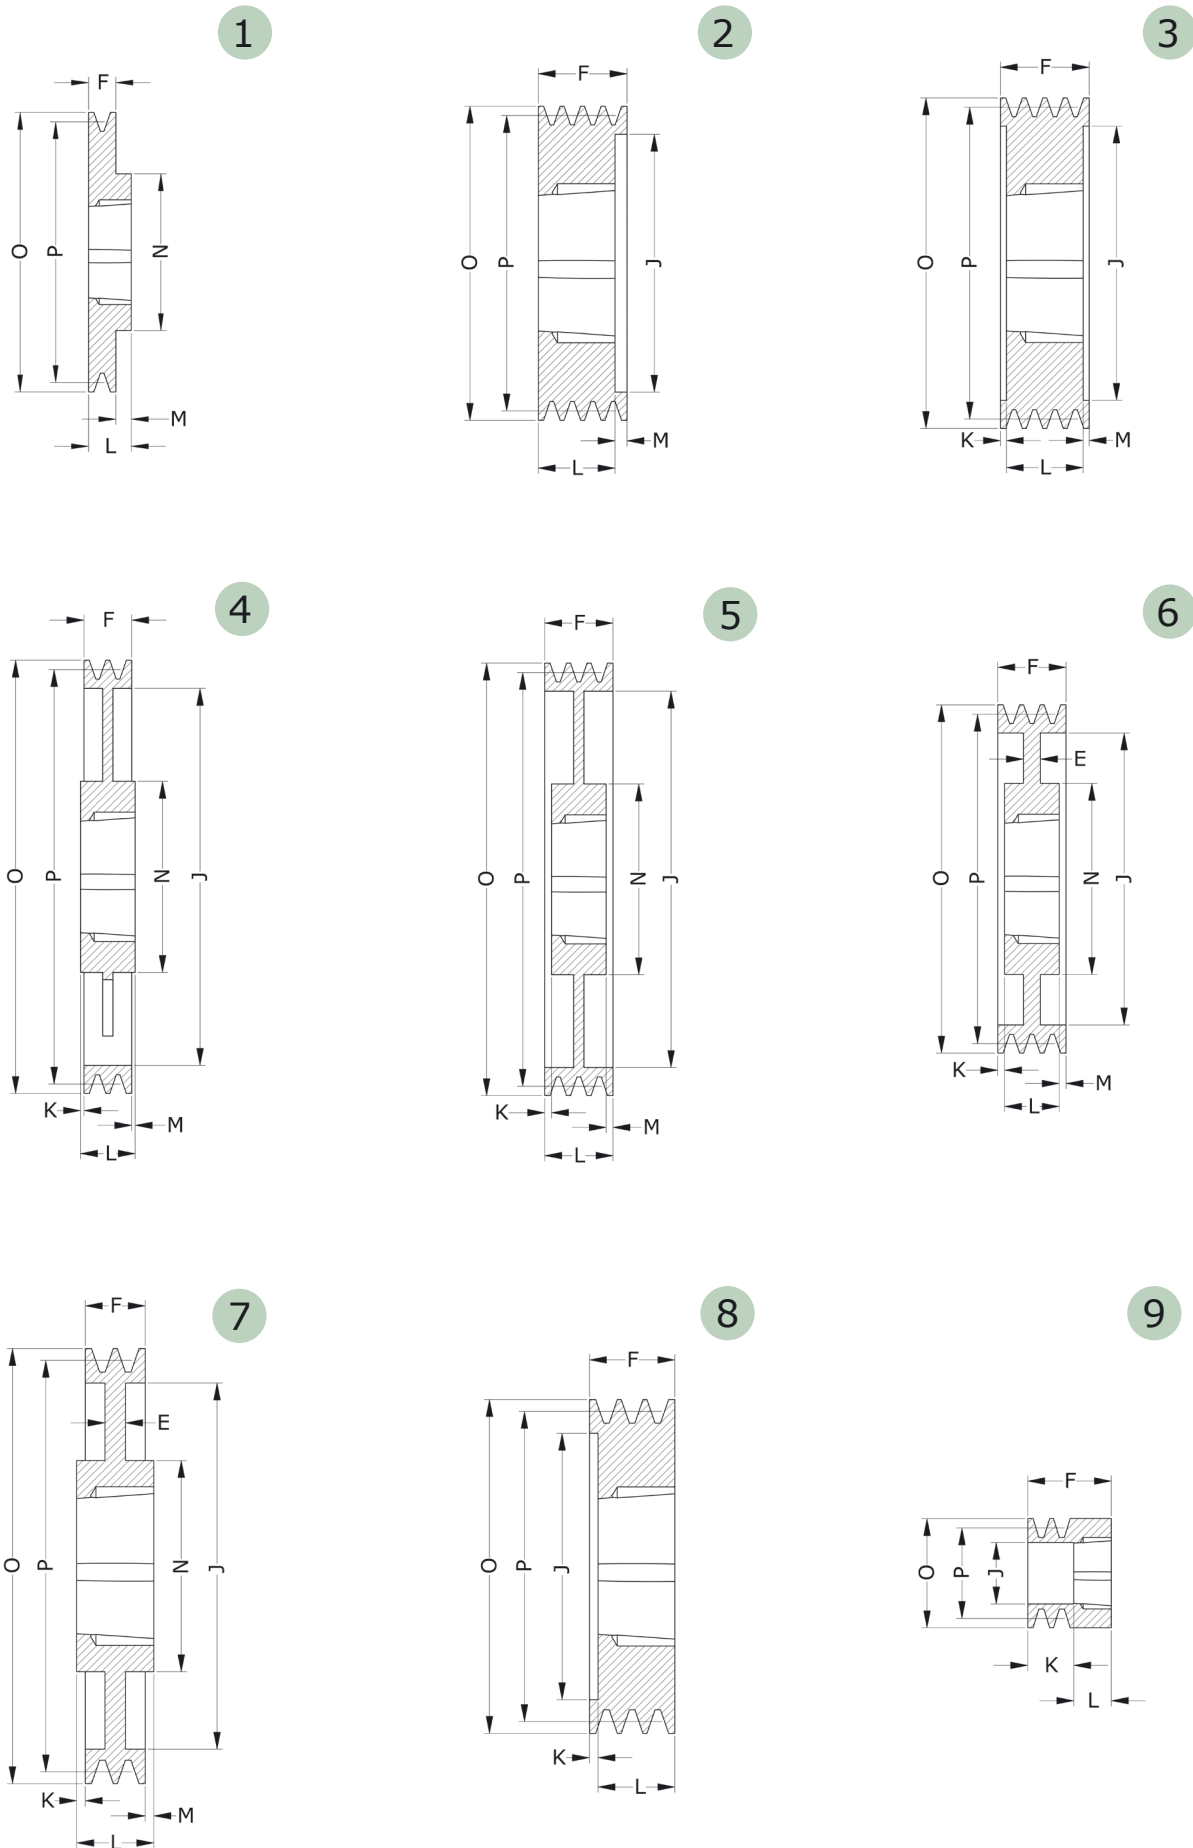



SPC kileremskiver - for taperbøsning


Effektiv diameter	Antal spor	O	Type se s. 32	TB-nr.	Aksel-hul	E	F	J	K	L	M	N
200	3	209,6	3	2517	18-65	-	85	144	20	45	20	-
	4	209,6	3	3020	28-75	-	111	144	30	51	30	-
	5	209,6	3	3535	35-100	-	136	144	23,5	89	23,5	-
	6	209,6	3	3535	35-100	-	162	144	36,5	89	36,5	-
	8	209,6	3	3535	35-100	-	213	144	62	89	62	-
212	3	221,6	3	3020	28-75	-	85	156	17	51	17	-
	4	221,6	3	3020	28-75	-	111	156	30	51	30	-
	5	221,6	3	3535	35-100	-	136	156	23,5	89	23,5	-
	6	221,6	3	3535	35-100	-	162	156	36,5	89	36,5	-
	8	221,6	3	3535	35-100	-	213	156	62	89	62	-
224	3	233,6	3	3020	28-75	-	85	168	17	51	17	-
	4	233,6	3	3535	35-100	-	111	168	11	89	11	-
	5	233,6	3	3535	35-100	-	136	168	23,5	89	23,5	-
	6	233,6	3	3535	35-100	-	162	168	36,5	89	36,5	-
	8	233,6	3	3535	35-100	-	213	168	62	89	62	-
236	3	245,6	3	3020	28-75	-	85	180	17	51	17	-
	4	245,6	3	3535	35-100	-	111	180	11	89	11	-
	5	245,6	3	3535	35-100	-	136	180	23,5	89	23,5	-
	6	245,6	3	3535	35-100	-	162	180	36,5	89	36,5	-
	8	245,6	3	3535	35-100	-	213	180	62	89	62	-
250	3	259,6	3	3020	28-75	-	85	194	17	51	17	-
	4	259,6	3	3535	35-100	-	111	194	11	89	11	-
	5	259,6	3	3535	35-100	-	136	194	23,5	89	23,5	-
	6	259,6	3	3535	35-100	-	162	194	36,5	89	36,5	-
	8	259,6	3	3535	35-100	-	213	194	62	89	62	-
	10	259,6	3	4040	40-100	-	264	194	81	102	81	-
265	3	274,6	1	3535	35-100	-	85	209	-	89	4	175
	4	274,6	3	3535	35-100	-	111	209	11	89	11	-
	5	274,6	3	3535	35-100	-	136	209	23,5	89	23,5	-
	6	274,6	3	3535	35-100	-	162	209	36,5	89	36,5	-
	8	274,6	3	3535	35-100	-	213	209	62	89	62	-
280	3	289,6	1	3535	35-100	-	85	224	-	89	4	175
	4	289,6	6	3535	35-100	18	111	224	11	89	11	175
	5	289,6	3	3535	35-100	-	136	224	23,5	89	23,5	-
	6	289,6	6	3535	35-100	20	162	224	36,5	89	36,5	175
	8	289,6	3	3535	35-100	-	213	224	62	89	62	-
	10	289,6	3	4040	40-100	-	264	224	81	102	81	-
300	3	309,6	7	3535	35-100	20	85	244	2	89	2	175
	4	309,6	6	3535	35-100	20	111	244	11	89	11	175
	5	309,6	6	3535	35-100	20	136	244	23,5	89	23,5	175
	6	309,6	6	3535	35-100	20	162	244	36,5	89	36,5	175
	8	309,6	3	4040	35-100	-	213	244	55,5	102	55,5	-
	10	309,6	3	4545	55-110	-	264	244	75	114	75	-
315	3	324,6	7	3535	35-100	20	85	259	2	89	2	175
	4	324,6	6	3535	35-100	20	111	259	11	89	11	175
	5	324,6	6	3535	35-100	20	136	259	23,5	89	23,5	175
	6	324,6	6	3535	35-100	20	162	259	36,5	89	36,5	175
	8	324,6	3	4040	35-100	-	213	259	55,5	102	55,5	-
	10	324,6	3	4545	55-110	-	264	259	75	114	75	-
335	3	344,6	7	3535	35-100	20	85	279	2	89	2	175
	4	344,6	6	3535	35-100	20	111	279	11	89	11	175
	5	344,6	6	3535	35-100	20	136	279	23,5	89	23,5	175
	6	344,6	6	3535	35-100	20	162	279	36,5	89	36,5	175
	8	344,6	6	4040	35-100	50	213	279	55,5	102	55,5	210
355	3	364,6	7	3535	35-100	20	85	299	2	89	2	175
	4	364,6	6	3535	35-100	20	111	299	11	89	11	175
	5	364,6	6	3535	35-100	20	136	299	23,5	89	23,5	175
	6	364,6	6	3535	35-100	20	162	299	36,5	89	36,5	175
	8	364,6	6	4040	35-100	40	213	299	55,5	102	55,5	210
	10	364,6	3	4545	55-110	-	264	299	75	114	75	-
375	3	384,6	7	3535	35-100	25	85	319	2	89	2	175
	4	384,6	6	3535	35-100	25	111	319	11	89	11	175
	5	384,6	6	3535	35-100	25	136	319	23,5	89	23,5	175
	6	384,6	6	4040	35-100	30	162	319	30	102	30	210
	8	384,6	6	4545	40-115	30	213	319	49,5	114	49,5	242
	10	384,6	3	4545	55-110	-	264	316	75	114	75	-

SPC kileremskiver - for taperbøsning



Effektiv diameter	Antal spor	Type		TB-nr.	Aksel-hul	E	F	J	K	L	M	N
		O	se s. 32									
400	3	409,6	7	3535	35-100	17	85	344	2	89	2	175
	4	409,6	6	3535	35-100	18	111	344	11	89	11	175
	5	409,6	6	3535	35-100	15	136	344	23,5	89	23,5	175
	6	409,6	6	4040	35-100	30	162	344	30	102	30	210
	8	409,6	6	4545	40-115	30	213	344	49,5	114	49,5	242
10	409,6	6	5050	70-125	70	264	344	68,5	127	68,5	267	
425	3	434,6	7	3535	35-100	17	85	369	2	89	2	175
	4	434,6	6	3535	35-100	18	111	369	11	89	11	175
	5	434,6	6	3535	35-100	20	136	369	23,5	89	23,5	175
	6	434,6	6	4040	55-125	30	162	369	30	102	24	210
	8	434,6	6	4545	55-125	30	213	369	49,5	114	49,5	240
450	3	459,6	4	3535	35-100	-	85	394	2	89	2	175
	4	459,6	5	3535	35-100	-	111	394	11	89	11	175
	5	459,6	5	4040	35-100	-	136	394	17	102	17	210
	6	459,6	6	4545	55-125	30	162	394	24	114	24	242
	8	459,6	6	5050	55-125	30	213	394	43	127	43	267
	10	459,6	6	5050	70-125	40	264	394	68,5	127	68,5	267
475	3	484,6	4	3535	35-100	-	85	419	2	89	2	175
	4	484,6	5	3535	35-100	-	111	419	11	89	11	175
	5	484,6	5	4040	35-100	-	136	419	17	102	17	210
	6	484,6	6	4545	55-125	30	162	419	24	114	24	242
	8	484,6	6	5050	55-125	30	213	419	43	127	43	267
500	3	509,6	4	3535	35-100	-	85	444	2	89	2	175
	4	509,6	5	3535	35-100	-	111	444	11	89	11	175
	5	509,6	5	4040	35-100	-	136	444	17	102	17	210
	6	509,6	5	4545	55-125	-	162	444	24	114	24	242
	8	509,6	6	5050	55-125	30	213	444	43	127	43	267
	10	509,6	6	5050	70-125	40	264	444	68,5	127	68,5	267
530	3	539,6	4	3535	35-100	-	85	474	2	89	2	175
	4	539,6	5	4040	35-100	-	111	474	4,5	102	4,5	210
	5	539,6	5	4545	55-125	-	136	474	11	114	11	240
	6	539,6	5	5050	55-125	-	162	474	17,5	114	17,5	265
	8	539,6	6	5050	55-125	30	213	474	43	127	43	267
560	3	569,6	4	3535	35-100	-	85	504	2	89	2	175
	4	569,6	5	4040	35-100	-	111	504	4,5	102	4,5	210
	5	569,6	5	4545	55-125	-	136	504	11	114	11	242
	6	569,6	5	5050	55-125	-	162	504	17,5	127	17,5	267
	8	569,6	5	5050	55-125	-	213	504	43	127	43	267
	10	569,6	5	5050	70-125	-	264	504	68,5	127	68,5	267
630	3	639,6	4	4040	40-115	-	85	574	8,5	102	8,5	210
	4	639,6	4	4545	40-115	-	111	574	1,5	114	1,5	242
	5	639,6	5	5050	55-125	-	136	574	4,5	127	4,5	267
	6	639,6	5	5050	55-125	-	162	574	17,5	127	17,5	267
	8	639,6	5	5050	55-125	-	213	574	43	127	43	267
10	639,6	5	5050	70-125	-	264	574	68,5	127	68,5	267	
710	4	719,6	4	5050	40-115	-	111	654	8	127	8	267
	5	719,6	5	5050	70-125	-	136	654	4,5	127	4,5	267
	6	719,6	5	5050	70-125	-	162	654	17,5	127	17,5	267
	8	719,6	5	5050	70-125	-	213	654	43	127	43	267
	10	719,6	5	5050	70-125	-	264	654	68,5	127	68,5	267
800	3	809,6	4	4545	55-125	-	85	737	14,5	114	14,5	242
	4	809,6	4	5050	70-125	-	111	737	8	127	8	267
	5	809,6	5	5050	70-125	-	136	737	4,5	127	4,5	267
	6	809,6	5	5050	70-125	-	162	737	17,5	127	17,5	267
	8	809,6	5	5050	70-125	-	213	737	43	127	43	267
	10	809,6	5	5050	70-125	-	264	737	68,5	127	68,5	267
1000	3	1009,6	4	5050	70-125	-	85	937	21	127	21	267
	4	1009,6	4	5050	70-125	-	111	937	8	127	8	267
	5	1009,6	5	5050	70-125	-	136	937	4,5	127	4,5	267
	6	1009,6	5	5050	70-125	-	162	937	17,5	127	17,5	267
	8	1009,6	5	5050	70-125	-	213	937	43	127	43	267
10	1009,6	5	5050	70-125	-	264	937	68,5	127	68,5	267	
1250	3	1259,6	4	5050	70-125	-	85	1187	21	127	21	267
	4	1259,6	4	5050	70-125	-	111	1187	8	127	8	267
	5	1259,6	5	5050	70-125	-	136	1187	4,5	127	4,5	267
	6	1259,6	5	5050	70-125	-	162	1187	17,5	127	17,5	267
	8	1259,6	5	5050	70-125	-	213	1187	43	127	43	267
	10	1259,6	5	5050	70-125	-	264	1187	68,5	127	68,5	267

Materiale: Støbejern EN-GJL-200 UNI EN 1561/GG20

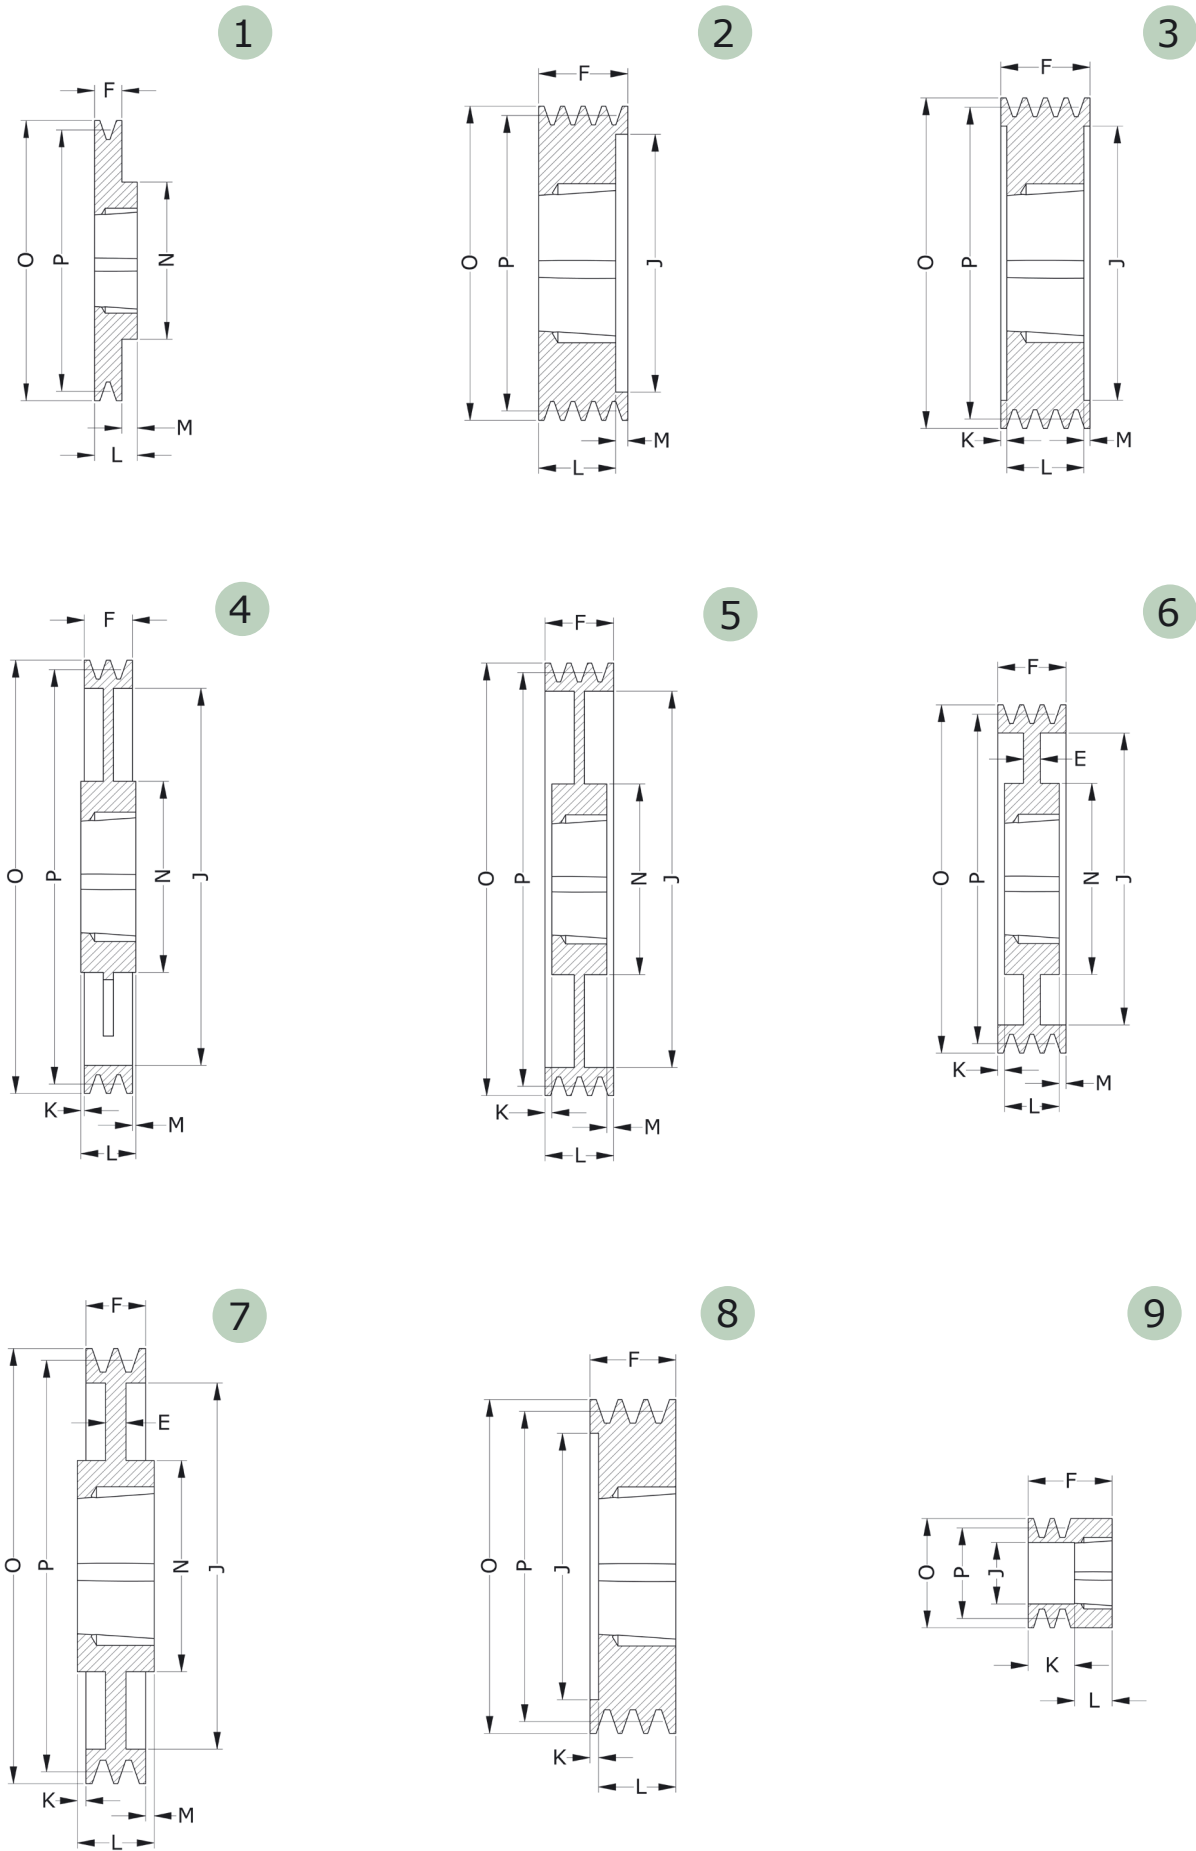

Se hele programmet samt aktuelle lagertal på www.klee.dk

SPZ kileremskiver - for taperbøsning



Effektiv diameter	Antal spor	Type		TB-nr.	Aksel-hul	E	F	J	K	L	M	N
		O	se s. 19									
50	1	54	9	1008	10-25	-	37	26	12	25	-	-
	2	54	9	1008	10-25	-	50	26	25	25	-	-
56	1	60	9	1008	10-25	-	37	32	12	25	-	-
	2	60	9	1008	10-25	-	49	32	27	22	-	-
60	1	64	1	1008	10-25	-	22	-	-	22	-	-
	2	64	9	1108	10-28	-	49	36	27	22	-	-
63	1	67	1	1108	10-28	-	16	-	-	22	6	56
	2	67	8	1108	10-28	-	28	40	6	22	-	-
	3	67	8	1108	10-28	-	40	40	-	22	-	-
67	1	71	1	1108	10-28	-	16	-	-	22	6	60
	2	71	8	1108	10-28	-	28	42	6	22	-	-
	3	71	8	1108	10-28	-	40	42	18	22	-	-
71	1	75	1	1108	10-28	-	16	-	-	22	6	60
	2	75	8	1108	10-28	-	28	42	6	22	-	-
	3	75	8	1108	10-28	-	40	42	18	22	-	-
75	1	79	1	1108	10-28	-	16	-	-	22	6	60
	2	79	8	1210	11-32	-	28	51	3	25	-	-
	3	79	8	1210	11-32	-	40	51	15	25	-	-
80	1	84	1	1210	11-32	-	16	-	-	25	9	75
	2	84	8	1210	11-32	-	28	51	3	25	-	-
	3	84	8	1210	11-32	-	40	51	15	25	-	-
	4	84	8	1210	11-32	-	52	51	27	25	-	-
85	1	89	1	1210	11-32	-	16	-	-	25	9	80
	2	89	8	1610	14-42	-	28	60	3	25	-	-
	3	89	8	1610	14-42	-	40	60	15	25	-	-
	4	89	8	1610	14-42	-	52	60	27	25	-	-
	5	89	8	1610	14-42	-	64	60	39	25	-	-
90	1	94	1	1210	11-32	-	16	-	-	25	9	80
	2	94	8	1610	14-42	-	28	61	3	25	-	-
	3	94	8	1610	14-42	-	40	61	15	25	-	-
	4	94	8	1610	14-42	-	52	61	27	25	-	-
	5	94	8	1610	14-42	-	64	61	39	25	-	-
	6	94	8	1610	14-42	-	76	61	51	25	-	-
95	1	99	1	1210	11-32	-	16	-	-	25	9	85
	2	99	8	1610	14-42	-	28	66	3	25	-	-
	3	99	8	1610	14-42	-	40	66	15	25	-	-
	4	99	8	1610	14-42	-	52	66	27	25	-	-
	5	99	8	1610	14-42	-	64	66	39	25	-	-
	6	99	8	1610	14-42	-	76	66	51	25	-	-
100	1	104	1	1210	11-32	-	16	-	25	9	85	-
	2	104	8	1610	14-42	-	28	71	3	25	-	-
	3	104	8	1610	14-42	-	40	71	15	25	-	-
	4	104	8	1610	14-42	-	52	71	27	25	-	-
	5	104	8	2012	16-50	-	64	71	32	32	-	-
	6	104	8	2012	16-50	-	76	71	44	32	-	-
106	1	110	1	1610	14-42	-	16	-	-	25	9	92
	2	110	8	1610	14-42	-	28	76	3	25	-	-
	3	110	8	1610	14-42	-	40	76	15	25	-	-
	4	110	8	1610	14-42	-	52	76	27	25	-	-
	5	110	8	2012	16-50	-	64	76	32	32	-	-
	6	110	8	2012	16-50	-	76	76	44	32	-	-
112	1	116	1	1610	14-42	-	16	-	-	25	9	92
	2	116	8	1610	14-42	-	28	83	3	25	-	-
	3	116	8	2012	16-50	-	40	83	8	32	-	-
	4	116	8	2012	16-50	-	52	83	20	32	-	-
	5	116	8	2012	16-50	-	64	83	32	32	-	-
	6	116	8	2012	16-50	-	76	83	44	32	-	-
118	1	122	1	1610	14-42	-	16	-	-	25	9	92
	2	122	8	1610	14-42	-	28	90	3	25	-	-
	3	122	8	2012	16-50	-	40	90	8	32	-	-
	4	122	8	2012	16-50	-	52	90	20	32	-	-
	5	122	8	2012	16-50	-	64	90	32	32	-	-
	6	122	8	2517	18-65	-	76	90	31	45	-	-



SPZ kileremskiver - for taperbøsning

Effektiv diameter	Antal spor	O	Type se s. 19	TB-nr.	Aksel-hul	E	F	J	K	L	M	N
125	1	129	1	1610	14-42	-	16	-	-	25	9	92
	2	129	8	1610	14-42	-	28	96	3	25	-	-
	3	129	2	2012	16-50	-	40	96	-	32	8	-
	4	129	2	2012	16-50	-	52	96	-	32	20	-
	5	129	8	2012	16-50	-	64	96	32	32	-	-
	6	129	8	2517	18-65	-	76	96	31	45	-	-
132	1	136	1	1610	14-42	-	16	-	-	25	9	92
	2	136	8	1610	14-42	-	28	103	3	25	-	-
	3	136	2	2012	16-50	-	40	103	-	32	8	-
	4	136	2	2012	16-50	-	52	103	-	32	20	-
	5	136	8	2517	18-65	-	64	103	19	45	19	-
	6	136	8	2517	18-65	-	76	103	31	45	-	-
140	1	144	1	1610	14-42	-	16	-	-	25	9	92
	2	144	8	1610	14-42	-	28	111	3	25	-	-
	3	144	2	2012	16-50	-	40	111	-	32	8	-
	4	144	2	2012	16-50	-	52	111	-	32	20	-
	5	144	2	2517	18-65	-	64	111	-	45	19	-
	6	144	2	2517	18-65	-	76	111	-	45	31	-
	8	144	3	2517	18-65	-	100	111	27,5	45	27,5	-
	150	1	154	1	1610	14-42	-	16	-	-	25	9
2		154	1	2012	16-50	-	28	-	-	32	4	112
3		154	2	2012	16-50	-	40	121	-	32	8	-
4		154	2	2517	18-65	-	52	121	-	45	7	-
5		154	2	2517	18-65	-	64	121	-	45	19	-
6		154	2	2517	18-65	-	76	121	-	45	31	-
8		154	3	2517	18-65	-	100	121	27,5	45	27,5	-
160		1	164	1	1610	14-42	-	16	-	-	25	9
	2	164	1	2012	16-50	-	28	-	-	32	4	112
	3	164	2	2012	16-50	-	40	131	-	32	8	-
	4	164	2	2517	18-65	-	52	131	-	45	7	-
	5	164	2	2517	18-65	-	64	131	-	45	19	-
	6	164	2	2517	18-65	-	76	131	-	45	31	-
	8	164	3	2517	18-65	-	100	131	27,5	45	27,5	-
	170	1	174	1	1610	14-42	-	16	-	-	25	9
2		174	1	2012	16-50	-	28	-	-	32	4	112
3		174	3	2012	16-50	-	40	141	4	32	4	-
4		174	2	2517	18-65	-	52	141	-	45	7	-
5		174	2	2517	18-65	-	64	141	-	45	19	-
6		174	2	2517	18-65	-	76	141	-	45	31	-
180	1	184	7	1610	14-42	6	16	152	-	25	9	92
	2	184	7	2012	16-50	6	28	152	-	32	4	112
	3	184	6	2012	16-50	7	40	151	-	32	8	106
	4	184	2	2517	18-65	-	52	151	-	45	7	-
	5	184	2	2517	18-65	-	64	151	-	45	19	-
	6	184	3	2517	18-65	-	76	151	15,5	45	15,5	-
	8	184	3	2517	18-65	-	100	151	27,5	45	27,5	-
	190	1	194	7	1610	14-42	12	16	162	-	25	9
2		194	7	2012	16-50	12	28	162	-	32	4	112
3		194	6	2012	16-50	10	40	161	4	32	4	112
4		194	3	2517	18-65	-	52	161	3,5	45	3,5	-
5		194	3	2517	18-65	-	64	161	9,5	45	9,5	-
6		194	3	2517	18-65	-	76	161	15,5	45	15,5	124
200	1	204	7	2012	16-50	10	16	171	-	32	16	112
	2	204	7	2012	16-50	6	28	171	-	32	4	112
	3	204	6	2012	16-50	10	40	171	4	32	4	112
	4	204	6	2517	18-65	8	52	171	3,5	45	3,5	124
	5	204	3	2517	18-65	-	64	171	9,5	45	9,5	-
	6	204	3	2517	18-65	-	76	171	15,5	45	15,5	124
	8	204	3	3020	28-75	-	100	171	24,5	51	24,5	-
	224	1	228	7	2012	16-50	15	16	195	-	32	16
2		228	4	2012	16-50	15	28	195	-	32	4	112
3		228	6	2012	16-50	12	40	195	4	32	4	112
4		228	6	2517	18-65	14	52	195	3,5	45	3,5	124
5		228	6	2517	18-65	20	64	195	9,5	45	9,5	124
6		228	6	2517	18-65	26	76	195	15,5	45	15,5	124
8		228	3	3020	28-75	-	100	195	24,5	51	24,5	-

SPZ kileremskiver - for taperbøsning



Effektiv diameter	Antal spor	Type		TB-nr.	Aksel-hul	E	F	J	K	L	M	N
		O	se s. 19									
250	1	254	4	2012	16-50	-	16	221	8,0	32	8	112
	2	254	4	2012	16-50	-	28	221	2	32	2	112
	3	254	5	2012	16-50	-	40	221	4	32	4	112
	4	254	6	2517	18-65	12	52	221	3,5	45	3,5	124
	5	254	6	2517	18-65	16	64	221	9,5	45	9,5	124
	6	254	6	2517	18-65	26	76	221	15,5	45	15,5	124
	8	254	6	3020	28-75	20	100	221	24,5	51	24,5	146
	280	1	284	4	2012	16-50	-	16	251	8,0	32	8
2		284	4	2012	16-50	-	28	251	2	32	2	112
3		284	4	2517	18-65	-	40	251	2,5	45	2,5	124
4		284	6	2517	18-65	14	52	251	3,5	45	3,5	124
5		284	6	2517	18-65	15	64	251	9,5	45	9,5	124
6		284	6	2517	18-65	15	76	251	15,5	45	15,5	124
8		284	6	3020	28-75	20	100	251	24,5	51	24,5	146
315		1	319	4	2012	16-50	-	16	286	8,0	32	8
	2	319	4	2012	16-50	-	28	286	2	32	2	112
	3	319	4	2517	18-65	-	40	286	2,5	45	2,5	124
	4	319	5	2517	18-65	-	52	286	3,5	45	3,5	124
	5	319	5	2517	18-65	-	64	286	9,5	45	9,5	124
	6	319	6	2517	18-65	15	76	286	15,5	45	15,5	124
	8	319	8									
	355	1	359	4	2012	16-50	-	16	326	8,0	32	8
2		359	4	2012	16-50	-	28	326	2	32	2	112
3		359	4	2517	18-65	-	40	326	2,5	45	2,5	124
4		359	5	2517	18-65	-	52	326	3,5	45	3,5	124
5		359	5	2517	18-65	-	64	326	9,5	45	9,5	124
6		359	5	2517	18-65	-	76	326	15,5	45	15,5	124
8		359	5	3030	35-75	-	100	326	12,5	76	12,5	146
400		1	404	4	2012	16-50	-	16	371	8,0	32	8
	2	404	4	2517	18-65	-	28	371	8,5	45	8,5	124
	3	404	4	2517	18-65	-	40	371	2,5	45	2,5	124
	4	404	5	2517	18-65	-	52	371	3,5	45	3,5	124
	5	404	5	3020	28-75	-	64	371	6,5	51	6,5	146
	6	404	5	3030	35-75	-	76	371	-	76	-	146
	8	404	5	3030	35-75	-	100	371	12,5	76	12,5	146
	450	1	454	4	2517	18-65	-	16	421	14,5	45	14,5
2		454	4	2517	18-65	-	28	421	8,5	45	8,5	124
3		454	4	2517	18-65	-	40	421	2,5	45	2,5	124
4		454	5	3020	28-75	-	52	421	0,5	51	0,5	146
5		454	5	3020	28-75	-	64	421	6,5	51	6,5	146
6		454	5	3030	35-75	-	76	421	-	76	-	146
8		454	5	3535	35-90	-	100	421	5,5	89	5,5	175
500		3	504	4	2517	18-65	-	40	471	2,5	45	2,5
	4	504	5	3020	35-75	-	52	471	0,5	51	0,5	146
	5	504	4	3030	35-75	-	64	471	6	76	6	146
	6	504	5	3030	35-75	-	76	471	-	76	-	146
630	3	634	4	3020	35-75	-	40	601	5,5	51	5,5	150
	4	634	4	3030	35-75	-	52	601	12	76	12	146
	5	634	4	3030	35-75	-	64	601	6	76	6	146
	6	634	4	3535	35-90	-	76	601	6,5	89	6,5	175
800	3	804	4	3020	35-75	-	40	771	5,5	51	5,5	146
	4	804	4	3030	35-75	-	52	771	12	76	12	146
	5	804	4	3535	35-90	-	64	771	12,5	89	12,5	178
	6	804	4	3535	35-90	-	76	771	6,5	89	6,5	178